

MPM-W PRO RT Series


1:1 Phase PF 1.0

6kVA ~ 10kVA



Features

- High power density
- LCD supports Rack/Tower convertible design
- N+X parallel redundancy, support maximum 4 units in parallel
- Online double conversion with full digital control
- Optimization battery group, the quantity of battery: 16/18/20pcs (Settable)
- Wide input voltage range: 110~286Vac
- Wide input frequency range
- Generator compatible
- ECO mode operation for energy saving
- Self-testing when UPS startup
- Multiple communication interface: RS232/USB/EPO (Relay card /SNMP card optional)
- Parallel kit default
- Maximum charging current up to 10A
- Cold start
- Intelligent fan speed regulation
- Multiple protection function: short-circuit, overload, overheat, battery overcharge and overdischarge, output low voltage and fan fault alarm

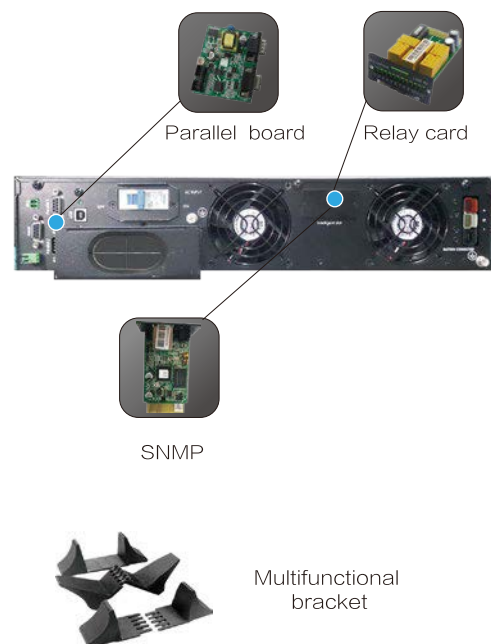

MPM-W PRO RT Series

1:1 Phase PF 1.0

6kVA ~ 10kVA

Technical Specifications:

MODEL	MPM-W PRO 6K RT	MPM-W PRO 10K RT
Capacity	6000VA/ 6000W	10000VA/ 10000W
INPUT		
Nominal voltage	208/220/230/240Vac	
Input voltage range	110~286Vac	
Power factor	≥0.99	
Bypass voltage range	Max.voltage:220V:+25% (Optional+10%,+15%,+20%) 230V:+20% (Optional+10%,+15%) 240V:+15% (Optional+10%) Min.voltage:-45% (Optional-20%,-30%)	
FREQUENCY		
Frequency range	40~70Hz (50/60Hz Auto-Sensing)	
OUTPUT		
Output voltage	208/220/230/240Vac	
Voltage regulation	± 1%	
Power factor	1.0	
Output frequency	± 1%/ ± 2% ± / ± 4%/ ± 5%/ ± 10% of the rated frequency (Optional)	
	Line mode	(50/60 ± 0.1%)Hz
	Bat. mode	
Crest factor	3:1	
Harmonic distortion (THDv)	≤2% Linear load ≤5% Non linear load	
Transfer time	AC mode to Bat.mode Inverter to Bypass	
		0ms 0ms
Output waveform	Pure Sinewave	
Overload	Line mode Load ≤ 110% last 60min; ≤ 125% last 10min; ≤ 150% last 1min; > 150% turn to bypass mode immediately Bypass mode 40A (Breaker) 63A (Breaker)	
Efficiency	94%	
BATTERY		
Battery voltage	± 96/ ± 108/ ± 120Vdc (Settable)	
Capacity (Standard unit)	12V 7Ah/8.2Ah/9Ah for option	
Typical recharging time	6~8 hours (to 90% of full capacity)	
Charging current	Max.current 10A (Charging current can be set according to battery capacity)	
INDICATORS		
LED display	Line mode,Bat.mode,ECO mode,Bypass mode,Battery low voltage,Overload & UPS fault	
LCD display	Input voltage,Input frequency,Output voltage,Output frequency,Load percentage, Battery voltage,Inner temperature& Remaining battery backup time	
ALARM		
Battery mode	Beeping every 4 seconds	
Battery low	Beeping every second	
Overload	Beeping twice every second	
Fault	Continuously beeping	
PHYSICAL		
Dimension W x D x H (mm)	440 x 625 x 86.5	
Net weight (kg)	16	18
ENVIRONMENT		
Operating temperature	0°C ~ 40°C	
Storage temperature	-25°C ~ 55°C	
Humidity range	20~95%RH @ 0~40°C (Non condensing)	
Altitude	<1500m,derating required when>1500m	
Noise level	<55dB at 1 Meter	<58dB at 1 Meter
STANDARDS		
Safety	IEC/EN62040-1,IEC/EN62477-1	
EMC	IEC/EN62040-2,IEC61000-4-2,IEC61000-4-3,IEC61000-4-4,IEC61000-4-5,IEC61000-4-6,IEC61000-4-8	

Specifications are subject to change without prior notice.
When output voltage is 208Vac, need to derate to 80% of the unit capacity.

MPM-W PRO RT Series

1:1 Phase PF 1.0

6kVA ~ 10kVA

MP BR 6–10kVA battery pack specification

BATTERY SYSTEM

Battery type	VRLA (Lead acid maintenance free battery)
Typical battery recharging time	6~8 hours (to 90% of full capacity)
Typical battery life	3~5 years, depend on discharging cycle and ambient temperature
System voltage	± 120Vdc
Battery quantity	1* ± 10 PCS
Capacity	7Ah/9Ah (12V)

PHYSICAL

Dimension W x D x H (mm)	440 x 680 x 131 (3U)
Net weight (kg)	58/63

ENVIRONMENT

Safety	CE
Operating environment	0°C~40°C
Relative humidity	0~95% (Non condensing)
Noise level	<40dB at 1 Meter

Specifications are subject to change without prior notice.